


652

**Differential pressure,
vacuum, overpressure,
transmitter**

0 to 1 bar

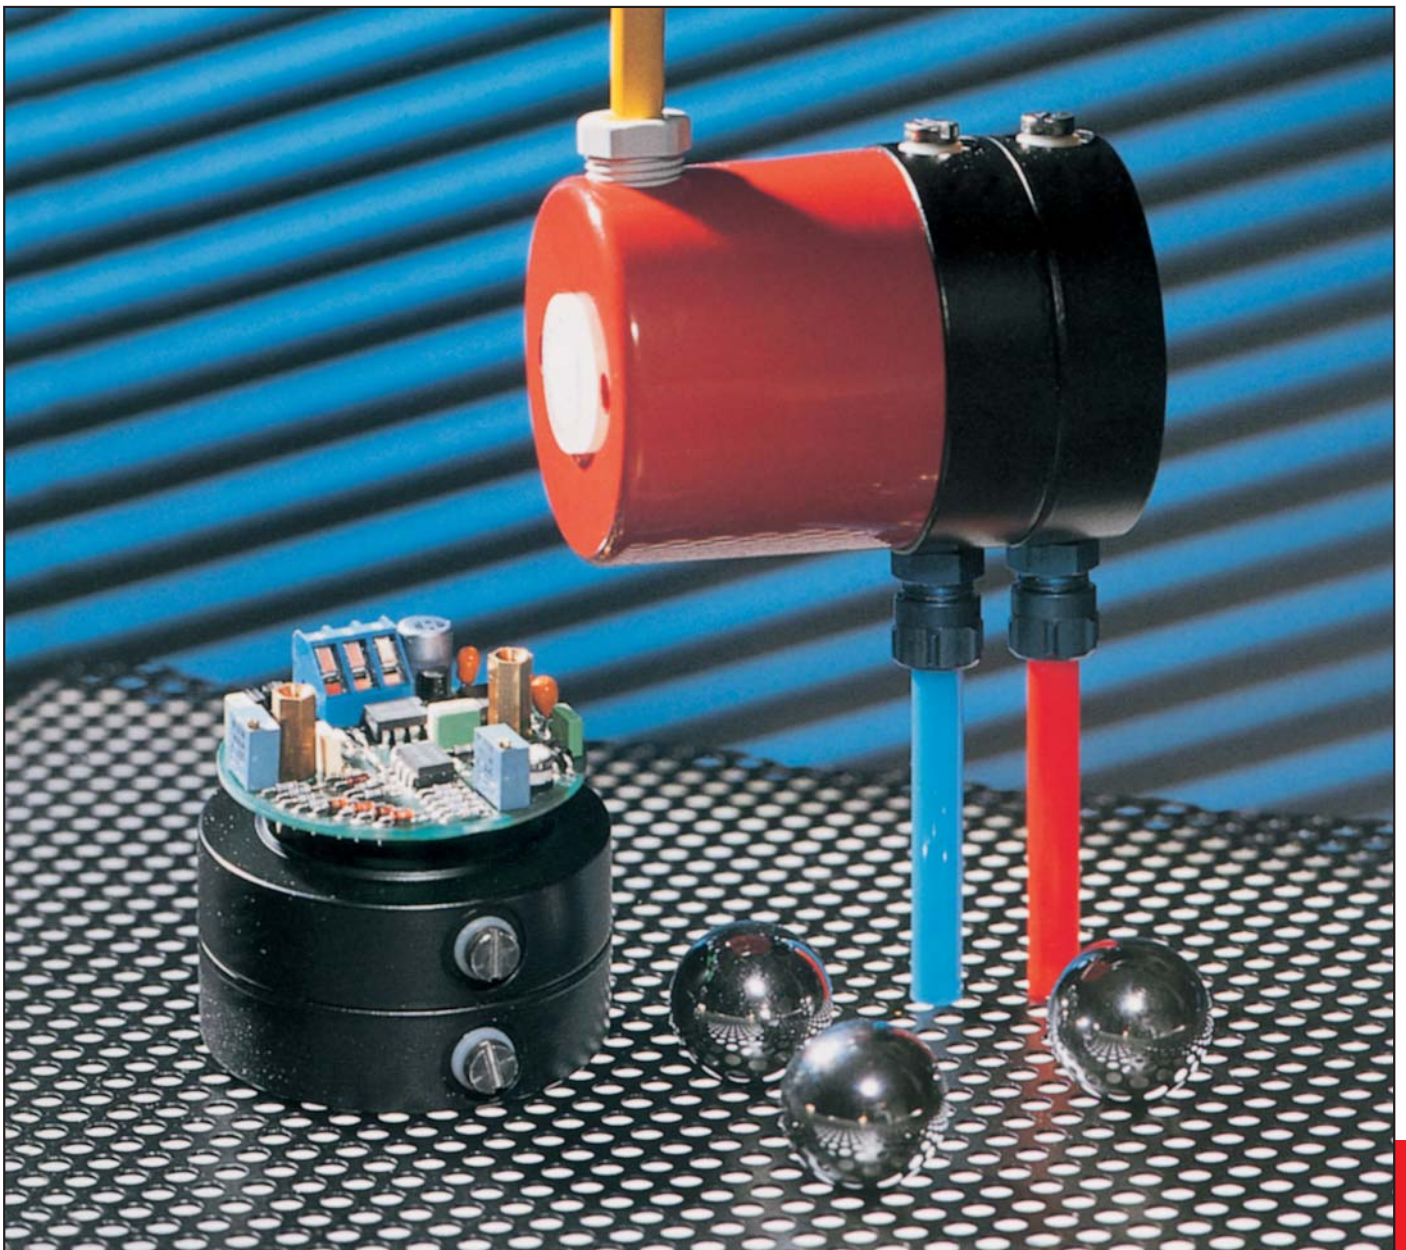

EDITION 12/2004

HUBA-REGISTERED TRADE MARK

Huba Control

FOR FINE PRESSURE AND FLOW MEASUREMENT




Technical overview

The differential pressure transmitter of type series 652 are used for the long- and short-distance transmission of electrical pressure-proportional signals. They are specially suited for the continuous level or flow monitoring of neutral and slightly aggressive liquids and gases in heating, ventilation and process technology.

The pressure or differential pressure to be monitored acts on a diaphragm, which in turn acts against a spring. As a result of the pressure action and the resultant diaphragm movement a permanent magnet fastened on the diaphragm moves in the direction of a hall sensor arranged outside the pressure case.

This sensor emits an electrical signal which is proportional to the magnetic field. The signal is linearized, compensated and amplified.

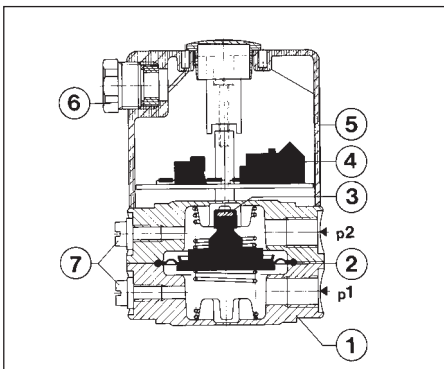

Legend to cross-section drawing

- 1 Pressure case
- 2 Diaphragm
- 3 Permanent magnet
- 4 Electronics
- 5 Cover
- 6 PG9 Union
- 7 Vent
- P1 Higher pressure / lower vacuum
- P2 Lower pressure / higher vacuum

The distinct advantages

- High overpressure safety margin 10/20 bar on P1
- 3 standardized output signals for direct processing in control/monitoring systems
- Functionally simple, rugged mechanics with high operating reliability
- Also for slightly aggressive liquids and gases
- Market-oriented attractive price/performance ratio

Pressure ranges

See order code selection table

Overload

Range up to 200 mbar: 10 bar
Range up to 500 mbar: 20 bar

Rupture pressure

30 bar

Accuracy

Linearity < +/- 1.5% fs
Hysteresis < +/- 1.5% fs
Zero point offset < +/- 1.0% fs

Higher accuracies on request

Housing material

Pressure case: Anodized black aluminium, brass or nickel-plated brass

Cover: Plastic

Diaphragm

A NBR-based	C FPM
E EPDM	F Silicon

Parts coming into contact with the medium, to pressure case and diaphragm:

X 12 CrMoS 17	1.4104
X 5 CrNi 18 9	1.4301
X 12 CrNi 17 7	1.4310

Temperature influences

Medium temperature

A NBR-based	0 ... + 80 °C
C FPM	- 10 ... + 80 °C
E EPDM	- 10 ... + 80 °C
F Silicon	- 40 ... + 80 °C

Temperature error

Temperature drift 0.08% fs/degree (20 °C related to zero point)

Dynamic response

Response time: < 5 ms
Load charge: < 10 Hz

Pressure connections

Inside thread G 1/8 P1 > P2

Weight

Pressure case aluminium	370 g
Pressure case brass / nickel-plated brass	860 g

Installation arrangement

Unrestricted. The transmitter is calibrated in the factory with the diaphragm positioned vertically. In the case of liquid media vent screw up, i.e. pressure connections down.

Outputs

0 – 10 V	3-wire cable
0 – 20 mA	3-wire cable
4 – 20 mA	3-wire cable

Power supply

20 – 30 VDC
24 VAC

Load

Current load	≤ 300 Ohm
Voltage load	≥ 10 kOhm

Current consumption

0 – 10 V	35 mA
0 – 20 mA	max. 55 mA
4 – 20 mA	max. 55 mA

Electrical connections / Protection standard


See order code selection table.
Other connections on request. Short circuit proof and with polarity reversal protection.

Accessories







Mounting bracket

Options

± ranges symmetrical and adjustable versions on request

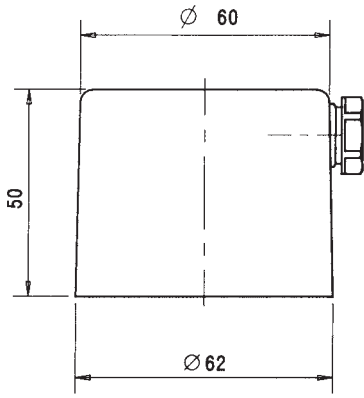

P1 > P2

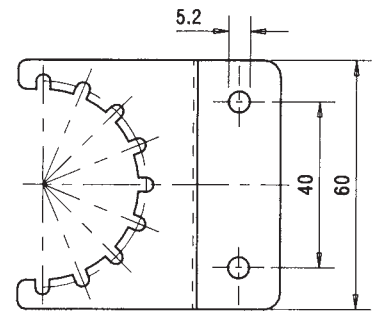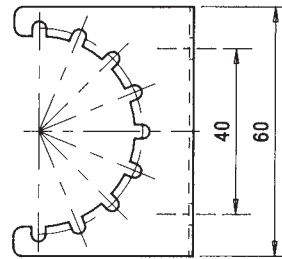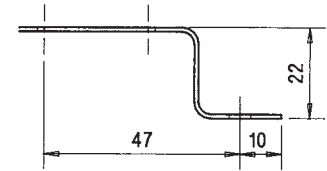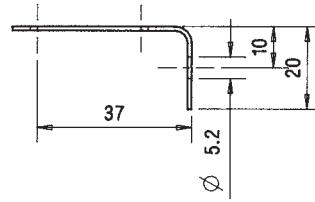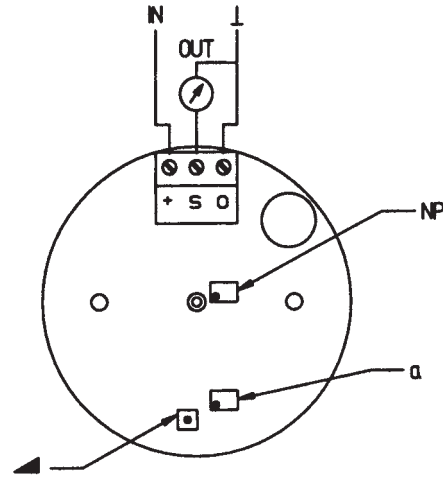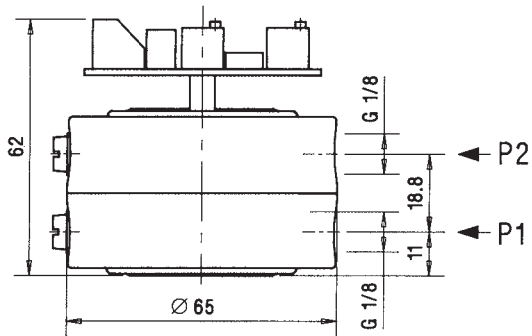

Type A

Type B

Electromagnetic compatibility: CE conformity (EMC) by application of harmonized standards: Interference stability EN 61000-6-2 and EN 61326-1, interference emit EN 61000-6-3 and EN 61326-1

Interference stability	Test standard		Effect
Electrostatic discharge (ESD)	EN 61000-4-2	8 kV air, 4 kV contact	no effect
High-frequency electromagnetic radiation (HF)	EN 61000-4-3	3 V/m, 80 ... 1000 Mz	- 400 - 1000 MHz:< 8% signal influence
Conducted HF interference	EN 61000-4-6	30 V, 0.15 ... 80 MHz	no effect
Fast transients (burst)	EN 61000-4-4	4 kV	no effect
Surge	EN 61000-4-5		no test
Magnetic fields	EN 61000-4-8	30 A/m, 50 Hz	no effect
Interference emit	Test standard		Effect
Conducted interference	EN 55022 (CISPR 22)	0.15... 30 MHz	no emission
Radiation from housing	30...1000 MHz, 10 m		no emission

Headquarters
 Huba Control Schweiz
 Industriestrasse 17
 CH-5436 Würenlos
 Telefon ++ 41 (0) 56 436 82 00
 Telefax ++ 41 (0) 56 436 82 82
 info.ch@hubacontrol.com

Huba Control United Kingdom
 Unit 3 Network Point, Range Road
 GB-Witney Oxfordshire OX29 0YD
 Tel 01993 776667
 Fax 01993 776671
 info.uk@hubacontrol.com
www.hubacontrol.com

Agent for: